RAYMARK RMT-SFP-SX DATASHEET

Features

- Data-Rate of 1.25Gbps operation
- 850nm VCSEL laser and PIN photodetector
- Compliant with SFP MSA and SFF-8472 with duplex LC receptacle
- Hot-pluggable SFP footprint
- Digital Diagnostic Monitoring: Internal Calibration or External Calibration
- 550m transmission with 50/125μm MMF
- 300m transmission with 62.5/125μm MMF
- Single +3.3V power supply
- RoHS Compliant
- Class 1 laser product complies with EN 60825-1
- Operating case temperature: 0°C ~70°C

Applications

- Gigabit Ethernet
- Fiber Channel
- Switch to Switch interface
- Switched backplane applications
- Router/Server Interface
- Other optical transmissionsystems

Description

The SFP optical transceivers are high performance, cost effective modules supporting data-rate of 1.25Gbps and 550m transmission distance with MMF.

The transceiver consists of three sections: a VCSEL laser transmitter, a PIN photodiode

Copyright © Raymark. Specifications and information provided in this document are subject to change by Raymark without prior notice.

integrated with a trans-impedance preamplifier ITIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472 for further information, please refer to SFP MSA.

Absolute Maximum Ratings

Parameter	*Symbol*	*Min.*	*Typ.*	*Max.*	*Units*
Storage Temperature	*Ts*	-40		85	°C
Supply Voltage	*Vcc*	-0.5		4.5	V
Operating Relative Humidity		5		95	%

Recommended Operating Conditions

Parameter	*Symbol*	*Min.*	*Typ.*	*Max.*	*Units*	*Note*
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Case Operating Temperature	*Top*	0		70	°C	CMD
		-40		85	°C	IMD
Power Supply Current	*Icc*			300	mA	
Data Rate			1.25		Gbp	

Digital Diagnostic Functions

Parameter	*Symbol*	*Accuracy*	*Unit*	*Notes*
Temperature Monitor Absolute Error	*DMI_Temp*	± 3	°C	Over operating Temp
Supply Voltage Monitor Absolute Error	*DMI_VCC*	±0.1	V	Full operating range
RX Power Monitor Absolute Error	*DMI_RX*	± 3 dB	dB	1
Bias Current Monitor	*DMI_Ibias*	± 10%	mA	
Laser Power Monitor Absolute Error	*DMI_TX*	± 3 dB	dB	1

Notes:

Copyright © Raymark. Specifications and information provided in this document are subject to change by Raymark without prior notice.

1. Due to measurement accuracy of different single mode fibers, there could be an additional +/-1 dB fluctuation, or a +/- 3 dB total accuracy.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Optical Center Wavelength	λ	830	850	860	nm	
Output Optical Power	P_{TX}	-9.5		-3	dBm	1
Extinction Ratio	ER	9			dB	
Spectral Width (RMS)	$\Delta\lambda$			0.85	nm	
Optical Rise/Fall Time (20%-80%)	t_r/t_f		100	150	ps	
Receiver						
Optical Center Wavelength	λ	770		860	nm	
Receiver Overload	P_{OL}	0			dBm	2
Receiver Sensitivity	P_{SEN}			-23	dBm	2
LOS Assert	LOS_A	-30			dBm	
LOS De-assert	LOS_D			-23	dBm	
LOS Hysteresis	LOS_H	0.5			dB	

Note:

2. The optical power is launched into MMF
3. Measured with a PRBS2^7-1 test pattern @1250Mbps, BER≦1x10^{-12}

Copyright © Raymark. Specifications and information provided in this document are subject to change by Raymark without prior notice.

Electrical Characteristics


Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Input Differential Impedance	ZIN	90	100	110	Ω	
Single Ended Data Input Swing	V_{IN_pp}	250		1200	mV	1
Transmit Disable Voltage	V_D	2		Vcc	V	
Transmit Enable Voltage	V_{EN}	V_{EE}		V_{EE}+0.8	V	
Receiver						
Data Output Swing Differential	V_{OUT}	400		1800	mV	2
Data Output Rise/Fall Time (20%~80%)	tr/tf		90	175	ps	
LOS	High	2	-	Vcc	V	
	Low	V_{EE}		V_{EE}+0.5	V	

Note:

1. PECL input, internally AC-coupled and terminated.
2. Internally AC-coupled.

Copyright © Raymark. Specifications and information provided in this document are subject to change by Raymark without prior notice.

Dimensions

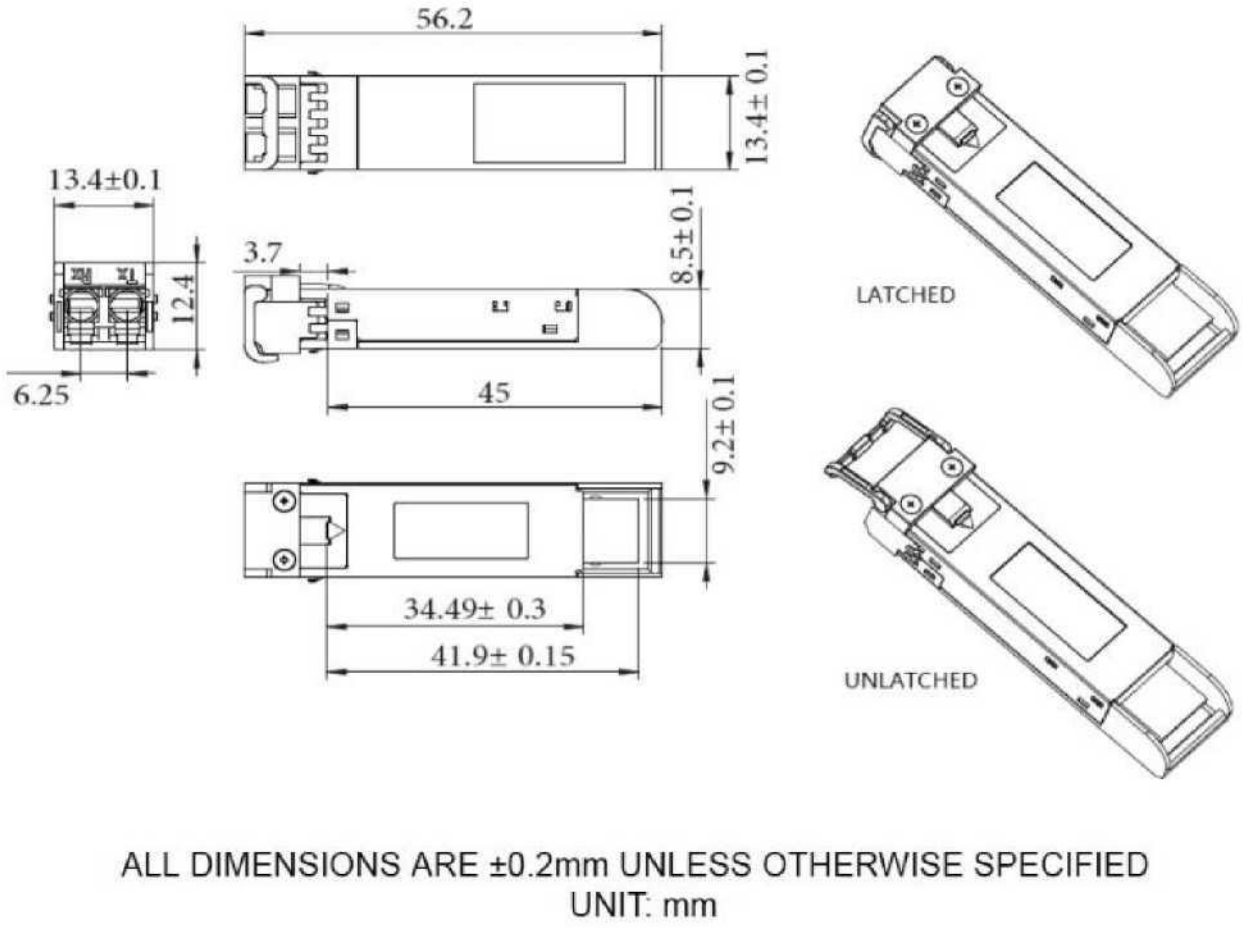

ALL DIMENSIONS ARE ±0.2mm UNLESS OTHERWISE SPECIFIED
UNIT: mm

Ordering Information

Model Number	*Wavelength*	*Temperature*
RMT-SFP-SX	850nm	0°C ~70 °C

Copyright © Raymark. Specifications and information provided in this document are subject to change by Raymark without prior notice.