

Switch 8

8-Port Gigabit Unmanaged Switch

Overview

The EnGenius ES108 is an 8-port Gigabit Switch, ideal for SMBs looking to enhance port density. It provides a plug-and-play experience with unmanaged ports, requiring no configuration for straightforward installation. This switch features a robust, fanless design for quiet operation and includes Energy Efficient Ethernet (IEEE 802.3az) that dynamically regulates power based on network traffic. Its non-blocking performance ensures efficient, seamless network connectivity.



Features & Benefits

- 8x GE ports for high-speed connections
- Plug and play and zero maintenance
- Ruggedized with metal housing design
- Fanless design with silent operation
- Energy Efficient Ethernet (IEEE 802.3az) which automatically detects network traffic and adjusts power consumption dynamically
- Non-blocking switching architecture

Technical Specifications

Technical Specifications

Port Standards

802.3u 100Base-TX Ethernet

802.3ab 1000Base-T Ethernet

Network Port - Gigabit Ethernet Ports

8x10/100/1000 Mbps Ports

Switching Capacity

16Gbps

Power Source

100 to 240 VAC, 50/60Hz

Physical Interface

Port Indicators

Link/Activity (per Ethernet port)

Environmental & Physical

Temperature Range

Operating: 32°F to 104°F (0°C to 40°C)

Humidity (Non-Condensing)

Operating: 5% - 90%

Device Dimensions & Weight

Device Dimensions & Weights

Weight: 227g

Length: 140 mm

Width: 67 mm

Height: 26 mm

Package Contents


1x ES Switch

1x Power Adapter

1x Wall mount screw

1x Quick installation guide

Hardware Overviews

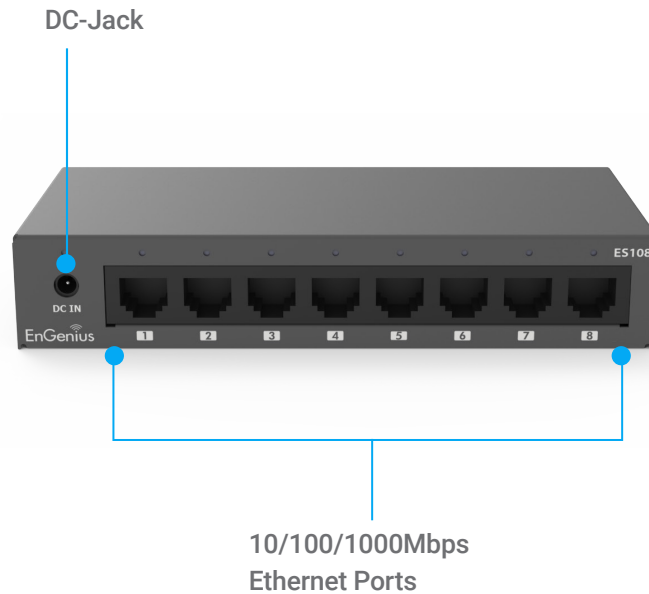

EnGenius Technologies | Costa Mesa, California, USA

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 714 432 8668

EnGenius Networks Singapore Pte Ltd. | Singapore

Email: techsupport@engeniustech.com.sg
Website: www.engeniustech.com.sg
Local contact: (+65) 6227 1088

EnGenius Technologies Canada | Ontario, Canada

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 905 940 8181

EnGenius Networks Dubai | Dubai, UAE

Email: support@engeniustech-me.com
Website: www.engeniustech-me.com
Local contact: (+971) 4 339 1227

EnGenius Networks Europe B.V. | Eindhoven, Netherlands

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+31) 40 8200 887

恩碩科技股份有限公司 | Taiwan, R.O.C.

Email: sales@engeniustech.com.tw
Website: www.engeniustech.com.tw
Local contact: (+886) 933 250 628

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

Version 1.0 03/ 11/ 2024

